


PLAN VIEW

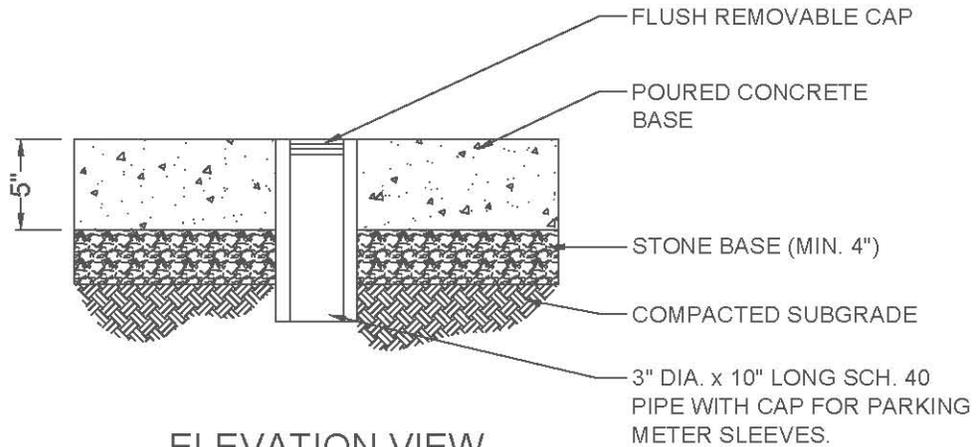

ELEVATION VIEW

NOTES:

1. POURED CONCRETE BASE SHALL BE CLASS C PORTLAND CEMENT CONCRETE.
2. SET POST A MINIMUM 4" DEPTH INTO CONCRETE. GROUT USING NON-SHRINK GROUT.

NOT TO SCALE



ENGINEERING &
PUBLIC WORKS

PARKING METER
REPLACEMENT DETAIL

APPROVED BY: *Andrew B. Stone*
Andrew B. Stone, PE, City Engineer & Director of Public Works

STD. DRAWING #:

106

DRAWN BY: Alex Ray, EI

DATE: 8/16/12